

D CLASS PREMIUM AMPLIFIER FPX 1.1000

Dual Output
Powerfull and compact




- D Class Mono amplifier – High power and current dynamic reserve
- Stable under 1 Ohm
- Audio Mos-Fets - Optimized efficiency
- High performance compact heat dissipation chassis
- Included remote

SPECIFICATIONS



AUDIO SPECIFICATIONS	
CEA power (4 ohms)	1x420 Watts RMS
Max. power (2 ohms)	1x700 Watts RMS
Max. power (1 ohm)	1x1000 Watts RMS
Bandwidth (-3dB)	15Hz – 250Hz
THD	0,08 %
SNR (1W/A)	> 76dBA

MECHANICAL DRAWING

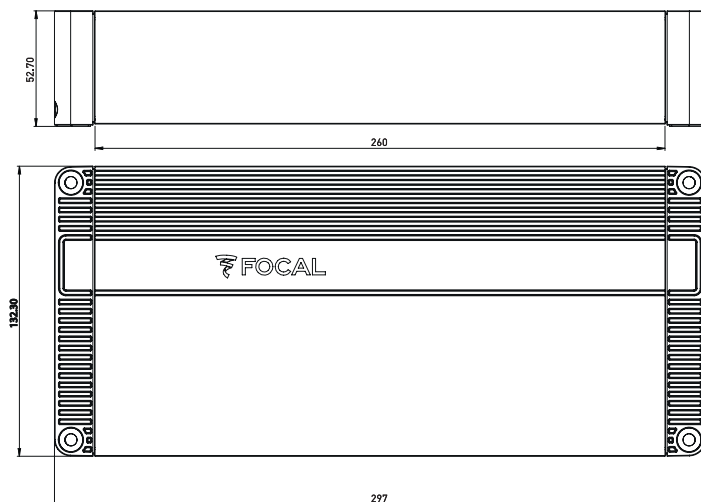

GENERAL FEATURES	
Subsonic filter	10Hz-50Hz (24dB/oct)
High-pass/low-pass filter	Low-pass 50Hz-250Hz (24dB/oct)
Bass boost	0 to 12dB linear
Phase	0 to 180° linear
Standby current (A)	1.75 A
Remote control	✓
Protections	Short circuit/low impedance/ reverse polarity/DC/voltage drop/overheat protection
Dimensions (LxWxH)	11 ^{1/4} x 5 ^{13/64} x 2 ^{33/32} " (297x132x53mm)
Weight (kg)	5.62lbs (2.55kg)

 **Performance**
CREATE YOUR SOUND

 **FOCAL**[®]
THE SPIRIT OF SOUND