

AB CLASS PREMIUM AMPLIFIER FPX 4.400 SQ

MODE 4/3/2 CHANNELS - DEDICATED TO SOUND QUALITY

- High performance compact heat dissipation chassis.




- High power and current dynamic reserve.

- Audiophile Sanken® Transistors.

KEY POINTS

- AB Class 4/3/2 Channel amplifier - Dedicated to sound quality
- Stable under 2 Ohms
- Audiophile Sanken® Transistors
- High performance compact heat dissipation chassis
- High power and current dynamic reserve

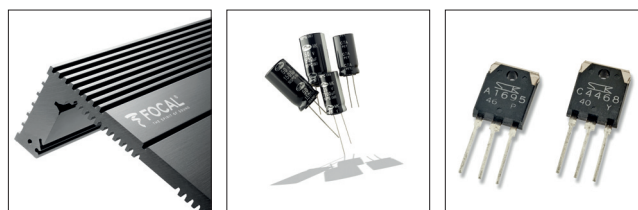

TECHNICAL SPECIFICATIONS



AB Class amplifier - 4/3/2 channels

CEA power (4 ohms): 4x70 Wrms

Maximum power (2 ohms): 4x100Wrms

Maximum power (bridged 4 ohms): 2x200Wrms

Bandwidth: 10Hz - 22KHz

Total harmonic distortion: 0.04%

SNR (1W/A) : >77dBA

Configurable filters High Pass / Low Pass :
40Hz-5000Hz

Mirroring Mode: (4CH/2CH)

Full range function

Protections: Short circuit / low impedance / reversal of polarity / DC / power drop / heat protection

Dimensions (LxHxW):

12^{23/64}x6^{57/64}x2^{1/4}" (314x175x57mm)

Weight: 8.16lbs (3.7kg)

 **Performance**
CREATE YOUR SOUND

 **FOCAL**
THE SPIRIT OF SOUND